

S123M Series **ver.2**

NEW

Hand-Held Ribbon Fiber Fusion Splicer



S123M ver.2 NEW Features

The S123M Series Hand-Held Ribbon Fiber Fusion Splicers have been enhanced and updated to version 2. The battery is automatically charged internally when connected to AC mains power even during operation. The new illumination lamp lights up a wide area around the V-grooves and helps operation in low light environment. The redesigned and strengthened heater simplifies the protection sleeve loading process.



Features and Applications

With their low profile design and light weight bodies the S123M series offer not only ribbon fiber splicing but also single fiber splicing with outstanding mobility and extreme ease-of-use. In addition, the rugged body is designed to endure harsh operating conditions by improving shock/impact resistance with rubber pads embedded on 4 corners of the splicer body. It achieves water resistance compliant IPX2 and dust resistance compliant IP5X.

The fast splice time and protection sleeve shrink time offers a highly efficient work environment. Large battery capacity makes it possible to perform 70 cycles of splicing and heating for S123M4 and 160 cycles for S123M8 and S123M12 with two batteries, while it offers SOC solution as well. By combining portability, ease-of-use, improved speed and durability, the S123M series become an excellent option for use in the conventional telecommunications industry.



PRODUCT LINE UP

Model	Application
S123M4-A	Single to 4 ribbon fiber (with Soft Case)
S123M4-B	Single to 4 ribbon fiber (with Hard Case)
S123M8	Single to 8 ribbon fiber
S123M12	Single to 12 ribbon fiber

Key Features

NEW Internal battery charging

NEW Illumination lamp lights up a wide area around V-grooves


- **IP-52 - Rugged and compact hand held design** for demanding environmental conditions
- **Fast splice (15 sec) at low loss and Fast heating (36 sec) for ribbon fiber** *1
- **Simple operation** with Fixed V-groove
- **Splicer is compatible with the Seikoh Giken Splice-on-connector (9mm bare fiber SOC)**
- **70 cycles (Splicing & heating) for S123M4 and 160 cycles for S123M8 and S123M12 with two batteries** *2
- **Available for All METRO/LAN/FTTx fibers** including **ultra bend-insensitive fibers** (e.g. EZ-Bend)
- **Easy maintenance** - Toolless electrode replacement/mirror free alignment system
- **Up-and-down fiber clamp system** allows automatic fiber re-positioning.
- **Easy software upgrade** via the Internet
- **PC interface software** to allow user manage splicing programs and results
- **Auto-start** shrink sleeve oven feature

NEW Improved GUI to further enhance ease-of-use


- **RoHS compliant**

*1 By using semi-auto mode for splicing and pre-heating mode for heating.

*2 By using semi-auto mode for splicing and regular mode for heating.

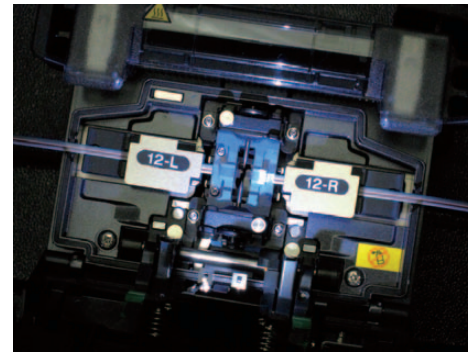

FITEL Splicer SOC partners



Under Tough Environment

S123M series passed criteria as below *3

Drop Resistance

76 cm drops from 5 different angles



Water Resistance

IPX2 rating drip proof *4



Dust Resistance

IP5X rating dust proof *5



*3 Above tests were performed at Furukawa Electric Labs, and do not guarantee that the machine will be undamaged under these conditions.

*4 IPX2 rating drip proof means that the machine can be exposed to 3 mm/min drip from 4 different angles with 15° tilt for 2.5 min each and still functions.

*5 IP5X rating dust proof means that the machine can be exposed to dust particles with a diameter of 0.1 to 25 µm for 8 hours and still functions.

SPECIFICATIONS

Applicable Fibers	SM (ITU-T G.652), MM (ITU-T G.651), DSF (ITU-T G.653), NZD (ITU-T G.655), BIF/UBIF (Bend Insensitive Fiber ITU-T G.657)	
Cladding Diameter	125 μ m	
Coating Diameter	Single fiber: 250 to 900 μ m, Ribbon fiber: 280 to 400 μ m (thickness)	
Fibers Cleave Length	10 mm	
Average Splice Loss	SM: 0.05 dB, MM: 0.02 dB, DSF 0.08 dB, NZD 0.08 dB	
Splice Time	Single fiber: 15 seconds, Ribbon fiber: 15 seconds	
Heat Time	Ribbon fiber: 36 seconds* ⁶ (S924: 40mm sleeve) (Pre-heat mode)	
Splice Programs	Max. 150	
Heat Programs	Max. 18	
Automatic Heating Start	Available	
Applicable Sleeves	40/60 mm	
Fiber Holding	Fiber holder System	
Tension Test	1.96 N	
Return Loss of Splice	60 dB or more	
Fiber Image Magnification	48X [S123M4], 28X [S123M8], 20X [S123M12]	
Splice Memory	Max.1500 [S123M4], Max.1000 [S123M8, S123M12]	
Image Capture Capacity	Last 100 images to be automatically captured + Up to 24 images to be stored permanently	
Dimension	S123M4	127W×199D×81H mm (not including shock absorber) 159W×231D×104H mm (including shock absorber)
	S123M8, S123M12	127W×199D×105H mm (not including shock absorber) 159W×231D×130H mm (including shock absorber)
Weight	S123M4	1.4 kg (without battery), 1.6 kg (with battery)
	S123M8, S123M12	1.6 kg (without battery), 2.0 kg (with two batteries)
Monitor	3.5" color LCD monitor	
Data Output	USB ver. 2.0 mini	
Battery Capacity ^{*7}	Typical 70 splice/heat cycles with S943B battery (S123M4)	
	Typical 160 splice/heat cycles with two S943B batteries (S123M8, S123M12)	
Wind Protection	Max. wind velocity of 15 m/s.	
Operating Temperature	-10 to 50°C (without excessive humidity)	
Storage Temperature	-40 to 60°C (without excessive humidity)	
Humidity	0 to 95% RH (non-condensing)	
Power Source	AC input 100 to 240 V (50/60 Hz), DC Input 11 to 17 V without any change of hardware	

*6 The first heating after turning on the power can be longer than usual heating time.

*7 The number of the splicing and heating the machine can produce using a full charged battery at room temperature of 20°C, semi-auto mode for splicing and regular mode for heating. Depending on the condition of the battery and the operation environment, the number can vary.

STANDARD PACKAGE

Item	P/N	Quantity			
		S123M4-A	S123M4-B	S123M8	S123M12
① S123M4 Main Body	S123-M4-A-0001	1	1	—	—
② S123M8 Main Body	S123-M8-A-0001	—	—	1	—
③ S123M12 Main Body	S123-M12-A-0001	—	—	—	1
④ Soft Carrying Case	SCC-01	1	—	—	—
⑤ Hard Carrying Case	HCC-01	—	—	1	1
⑥ Hard Carrying Case	HCC-02	—	1	—	—
⑦ Battery Pack	S943B	1	1	1* ⁸	1* ⁸
⑧ Spare Electrodes	S969	1pair	1pair	1pair	1pair
⑨ AC Adapter for S123 and S958C	S976A	1	1	1	1
⑩ AC Cable Cord	—	1	1	1	1
⑪ Electrode Sharpener	D5111	1	1	1	1
⑫ Cleaning Brush	VGC-01	1	1	1	1
⑬ Tool Case	TCC-01	1	1	1	1
⑭ Fiber Reformer (4)	S122-X-A-0007	1pair	1pair	—	—
⑮ Fiber Reformer (8/12)	S122-X-A-0008	—	—	1pair	1pair
User Manual	—	1	1	1	1



*8 2nd battery can be purchased as an optional item.

OPTIONAL COMPONENTS

Item	P/N	Quantity
① Soft Carrying Case	SCC-01	1
② Battery Charger	S958C	1
③ AC Adaptor for S958C	S977A	1
④ Cooling Tray	CTX-01	1
⑤ Angled Stand	AGS-01	1
⑥ Working Belt	WBT-01	1
⑦ USB Cable	USB-01	1
⑧ Car Cigarette Cable	CDC-01	1
⑨ Tripod Adaptor	TPA-01	1
⑩ Fiber Holder		
250 μ m coating diameter fiber	S712S-250	1pair
500 μ m coating diameter fiber ^{*9}	S712S-500	1pair
900 μ m coating diameter fiber	S712S-900	1pair
2 Ribbon Fiber Holder	S712A-002	1pair
4 Ribbon Fiber Holder	S712A-004	1pair
6 Ribbon Fiber Holder	S712A-006	1pair
8 Ribbon Fiber Holder	S712A-008	1pair
10 Ribbon Fiber Holder	S712A-010	1pair
12 Ribbon Fiber Holder	S712A-012	1pair
12 Ribbon Fiber Holder Wide	S712A-012W	1pair
Loose Tube Fiber (Left side)	S712S-LT-L	1
Loose Tube Fiber (Right side)	S712S-LT-R	1
⑪ SOC Holders		
<For Ferrule>		
Seikoh Giken FC/SC connector (9 mm)	S712C-SGS9-L	1
Seikoh Giken LC connector (9 mm)	S712C-SGL9-L	1
<For Cordage>		
Seikoh Giken Cordage (9 mm)	S712C-SGC9-R	1
⑫ Fiber Transporter		
For S123M4	TRP-03	1
For S123M8, S123M12	TRP-04	1
⑬ Fiber Transporter Holders	TRH-01	1
Smart Fuse	SF-01	1
Software Interface for Machine		

*9 Used for 400 to 500 μ m coating diameter fiber.



⑤ Angled Stand in Action



⑫ Fiber Transporter in Action



⑥ -1 Working Belt in Action



⑥ -2 Working Belt in Action

Contact Us:

Furukawa Electric Co., Ltd.

Head Office:

2-3, Marunouchi 2-chome,
Chiyoda-ku, Tokyo,
100-8322, Japan
TEL: +81 3 3286 3227
FAX: +81 3 3286 3978
www.furukawa.co.jp
comsales@ho.furukawa.co.jp

Europe:

Furukawa Electric Europe, Ltd.

3rd Floor, Newcombe House
43-45 Notting Hill Gate,
London W11 3FE U.K.
TEL: +44 20 7313 5320
FAX: +44 20 7313 5310
www.furukawa.co.uk
splicers@furukawa.co.uk

North & South America:

OFS Fitel, LLC

2000 Northeast Expressway
Norcross, Georgia 30071, U.S.A
TOLL FREE: +1 866 452 9516
TEL: +1 678 783 1090
FAX: +1 678 783 1093
www.ofsoptics.com
splicers@ofsoptics.com

China:

Furukawa Shanghai, Ltd. Beijing Branch

1001A, Full Tower, No.09 Dong-
sanhuan ZhongRoad, Chaoyang
District, Beijing 100020, P.R. China
TEL: +86 10 8591 0608
FAX: +86 10 8591 0609
www.furukawa-sh.cn

South East Asia:

Furukawa Electric Singapore Pte. Ltd.

10 Anson Road, #25-08
International Plaza, Singapore
079903
Tel: +65 6328 9870
Fax: +65 6224 2362
comms@furukawa.com.sg

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan.
In addition, the Export Administration Regulations (EAR) of the United States may be applicable.
In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost.
Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.



eFriendly Logo Mark

This logo mark indicates that the products and services satisfy the standards of environmentally friendly products of the Furukawa Electric Group.

* Furukawa Electric reserves the right to improve, enhance, or modify the features and specifications of FITELE products without prior notification.
* Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.

* This catalogue is printed using environmentally friendly paper and ink.

AC2T-120068

JE-207 2D11 TR 200